




6200 Cochran Rd.  
Solon, Ohio 44139  
888-972-7848 - Toll Free  
440-349-5432 - Fax  
www.wraptite.com -  
info@wraptite.com



## Product Data Sheet

### 2.5 Mil Carton Sealing Tape

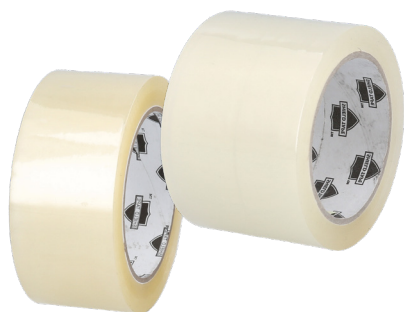

#### Product Description:

High-performance grade acrylic packaging tape for heavy duty manual and automated industrial sealing of cartons exposed to rough handling and load stress. With excellent quick stick and superior clarity in a wide range of applications, environments, and temperatures

<b>Backing:</b>	1.6 Mil
<b>Adhesive:</b>	Acrylic emulsion adhesive.
<b>Color(s):</b>	Clear.
<b>Elongation (% At Break)</b>	166% (ASTM D3759)
<b>Tensile Strength</b>	22 lbs. / in (ASTM D3759)
<b>Adhesion to Steel</b>	34.7 ozf / in (ASTM D3330)
<b>Total Thickness:</b>	2.5 Mil (ASTM D3652)
<b>Temperature Range:</b>	23°F to 104°F (Application) 0°F to 200°F (Operating)
<b>Adhesive Thickness:</b>	0.9 Mil
<b>Shear Strength (on paper):</b>	3.33 hr. (min.) (ATSM D3654)

#### Item ID Numbers

**Here:** 25CST2110C &  
25CST3110C

#### Wrap-Tite, Inc.

6200 Cochran Rd.  
Solon, Ohio 44139

**Toll Free:** 888-WRAP-TITE

**Fax:** 440-349-5432  
www.wraptite.com -  
info@wraptite.com

We believe the statements and information contained herein are accurate but are to be used only as general guidelines and are not warrants or guarantees because of the variety of possible uses. THERE IS NO WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. THE BUYER MUST TEST THE SUITABILITY FOR EACH INTENDED APPLICATION BEFORE USING. WRAPTITE WILL NOT BE LIABLE FOR DAMAGES IN EXCESS OF THE PURCHASE PRICE OF ITS PRODUCTS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.